

JetTM 100 Glue Application Valve

The Jet100 is a compact, non-contact glue valve capable of handling low to medium viscosity adhesives and midrange pressures.


The Jet100 glue valve has additional features designed to reduce set-up times and maintenance such as waterflushing, quick release bracketry and product guides.

- Compact size
- High accuracy
- Fast response for pattern flexibility at high speed
- Low set-up and maintenance times for increased efficiency
- Used with low, medium or standard pressure
- Direct replacement for Series 22 & 33 ball valves
- Valve dimensions:
59 mm (2.3 in) x 41 mm (1.6 in)

www.whleary.com

GLUE VALVE

Jet100 Valve

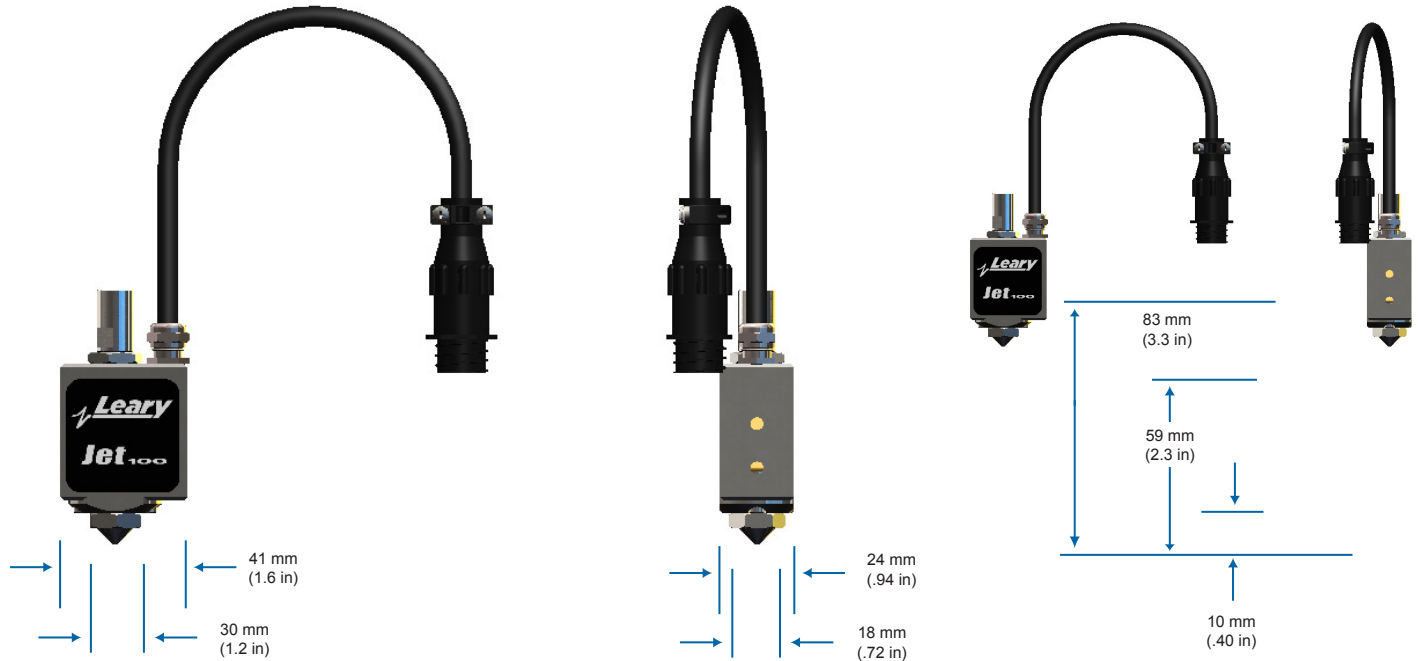

PHYSICAL CHARACTERISTICS

- Dimensions:
 - 41 mm (1.6 in) l
 - 24 mm (.94 in) w
 - 83 mm (3.3 in) h
- Weight:
 - .346 kg (.77 lbs)

NOZZLE SIZES

- PJB03000 - Nozzle, PafraJet B, .30mm
- PJB04000 - Nozzle, PafraJet B, .40mm*
- PJB05000 - Nozzle, PafraJet B, .50mm
- PJB06000 - Nozzle, PafraJet B, .60mm
- PJB07000 - Nozzle, PafraJet B, .70mm
- PJB09900 - Nozzle, PafraJet B, 1.00mm

*Included nozzle size, other sizes optional.

POWER REQUIREMENTS

- Spike: 48 VDC
- Hold: 12 VDC

ADHESIVES

- Recommended glue viscosity range:
 - 0.2 to 0.6 Pa·s (200 to 600 cps)

PART NUMBERS

- P9710045 – Jet100 Microadjust Glue Valve
- PJB10500 – Jet100 Repair Kit
- PJC10300 – Jet100 / 200 Spring
- PJC10500 – Jet100 / 200B Plunger
- PJC10400 – Jet100N / 200N Plunger
- A9300 – Waterflushing option

Corporate Office
8440 B West 183 Place
Tinley Park, IL 60487
USA
PH: +1(708) 444-4900
sales.us@whleary.com
www.whleary.com

European Office
2 Seax Way, Basildon
Essex SS15 6SW
United Kingdom
tel: +44 (0) 1268 490035
info@whleary.co.uk
www.whleary.co.uk

