


Shown on a folder gluer

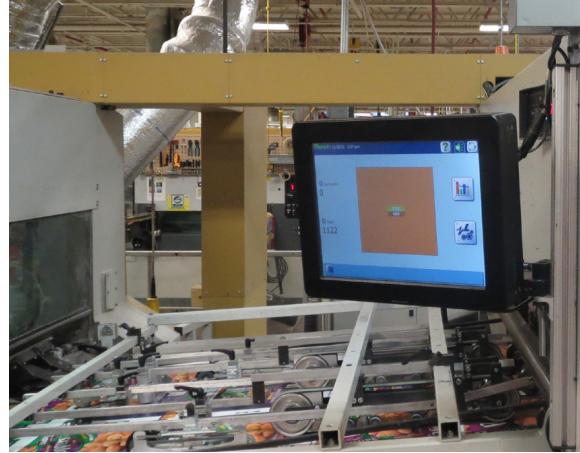

Shown on a cutter

maQ with Monet™ OS Quality Assurance Controller

The **MAQ™** Detection Controller with Monet OS is available with any of the 70+ monitoring options available from Leary to produce 100% fit-for-use cartons. All triggers and encoders are monitored through our closed loop SureScan™ technology, guaranteeing 100% inspection.

iQ™ Smart Services is available, with remote support and cloud-based data collection, providing data such as job tracking, production totals, down codes, defects and more.

Choose from over 70 detection options to complete your system including glue, 1D and 2D barcode, pharmacode, cello, skew, double feed, and more. The MAQ controller comes standard with Jam and Overlap detection, electronically monitoring carton flow.

- Up to 3 detection stations
- Over 70 detection options
- Versatile rejection options
- Built-in touch screen 38 cm (15 in)
- Glue volume detection
- Detection accuracy at 200,000 cartons/hr and 750 m/min (2,500 ft/min)
- Can be configured for shutdown only or with versatile rejection options
- iQ Smart Services compatible
- Built in production report

www.whleary.com

CONTROLLER

MAQ Controller with Monet



CONTROLLER SPECIFICATIONS

- 3 patterns
- Barcode/Pharmacode detection capable
- 3 Triggers
- Trigger assignment option
- 2 Encoder inputs
- Batch count option
- Lockout feature
- Double feed/Jam detection - machine shutdown
- Metric or Standard measurement capable
- Stores 1000+ jobs
- Resolution
 - 0.25 mm (0.01 in) at 182 m/min (600 ft/min)
 - 0.75 mm (0.03 in) at 545 m/min (1,800 ft/min)
 - 1.25 mm (0.05 in) at 910 m/min (3,000 ft/min)

CONTROLLER CHARACTERISTICS

Power Requirements

- 85-264 VAC
- 47-63 Hz frequency

Trigger Options

- 1 trigger per station for Folder gluer applications
- 2 triggers for Die-cutter applications in which the barcode is read on the top of the pallet
- 3 triggers for Die-cutter applications in which the barcode is read on the infeed table, after the feeder

Controller Quality Assurance Options

- Use with barcode, pharmacode
- Mixed copy, insert detection, many more
- SureScan technology guarantees that all triggers pulse

PHYSICAL CHARACTERISTICS

- Dimensions:
 - 381 mm (15 in) w
 - 305 mm (12 in) h
 - 73 mm (2.9 in) d
- Weight: 5.56 kg (12.25 lbs)

COMPONENTS

- Touch screen controller
- Monet software
- Mounting bracket
- Built-in buzzer included
- Maximum 3 stations, many configurations
 - 3 total patterns
 - Any pattern can be used for a barcode reader*

ADDITIONAL OPTIONS

- Up to 3 QA stations
- Remote beacon with audible alarm
- iQ Smart Services with remote support and cloud-based data collection
- Rejection options:
 - Spray Rejection
 - Batch/Reject
 - Rotary Ejector
 - In-line Diverter

SAFETY

- CE tested

**Only one barcode reader of each type may be used.*

Corporate Office
8440 B West 183 Place
Tinley Park, IL 60487
USA
PH: +1(708) 444-4900
sales.us@whleary.com
www.whleary.com

European Office
2 Seax Way, Basildon
Essex SS15 6SW
United Kingdom
tel: +44 (0) 1268 490035
info@whleary.com
www.whleary.co.uk

