

Batch/Reject Kicker

The **Batch/Reject Kicker** is used in conjunction with all Leary controllers for batch marking, reject kicking and rotary ejection assistance while using a Leary ejector on narrow body cartons.


The durable and compact design ensures high speed performance. This device can kick cartons as small as 75 mm (3 in) at speeds in excess of 150,000 cartons/hr.

- Durable compact design
- Fast cycle time
- Versatile mounting
- Works with all Leary Quality Assurance controllers
- Manual test button

www.whleary.com

PRODUCT REJECTION

Batch/Reject Kicker

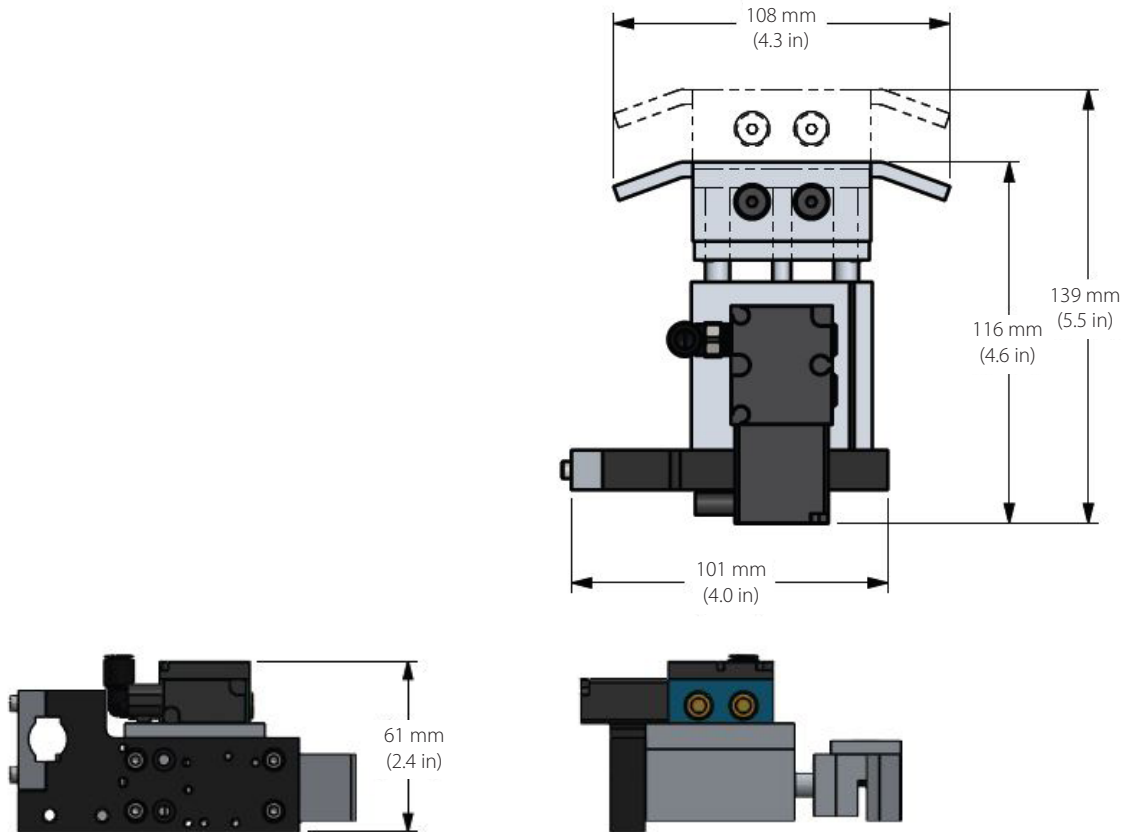

PHYSICAL CHARACTERISTICS

- Dimensions:
 - 116 mm (4.6 in) l
 - 108 mm (4.3 in) w
 - 61 mm (2.4 in) h
- Weight: .680 kg (1.5 lbs)
- Power Consumption: 5.4 W
- Operating Voltage: 24 VDC

CONTROLLER COMPATIBILITY

- Compatible with all Array™ and MAQ™ systems that are upgraded to include a rejection system

PRESSURE

- 5.5 bar (80 psi) recommended, 6.9 bar (100 psi) maximum
- Required Air filter-regulator-lubricator (FRL) included

STROKE / AIR FLOW

- 25 mm (1 in) stroke length

SPEEDS

- 35 ms cycle time
- Kicker out: 15 ms
- Kicker in: 20 ms

SAFETY

- CE tested

Corporate Office
8440 B West 183 Place
Tinley Park, IL 60487
USA
PH: +1(708) 444-4900
sales.us@whleary.com
www.whleary.com

European Office
2 Seax Way, Basildon
Essex SS15 6SW
United Kingdom
tel: +44 (0) 1268 490035
info@whleary.co.uk
www.whleary.co.uk

